

CUSTOMFIT

bachmaier® *silence* 

// BG-Zulassung | Occupational insurance association licence
// Geprüft nach EN 352-2 | Tested in accordance with EN 352-2




22dB
SNR

Schalldämmung | Sound attenuation

SNR-Wert SNR value (dB)	H-Wert H value (dB)	M-Wert M value (dB)	L-Wert L value (dB)
22	25	18	15

Dämmkurve | Attenuation curve

Mittelwert der Schalldämmung (dB) | Average value of sound attenuation (dB)

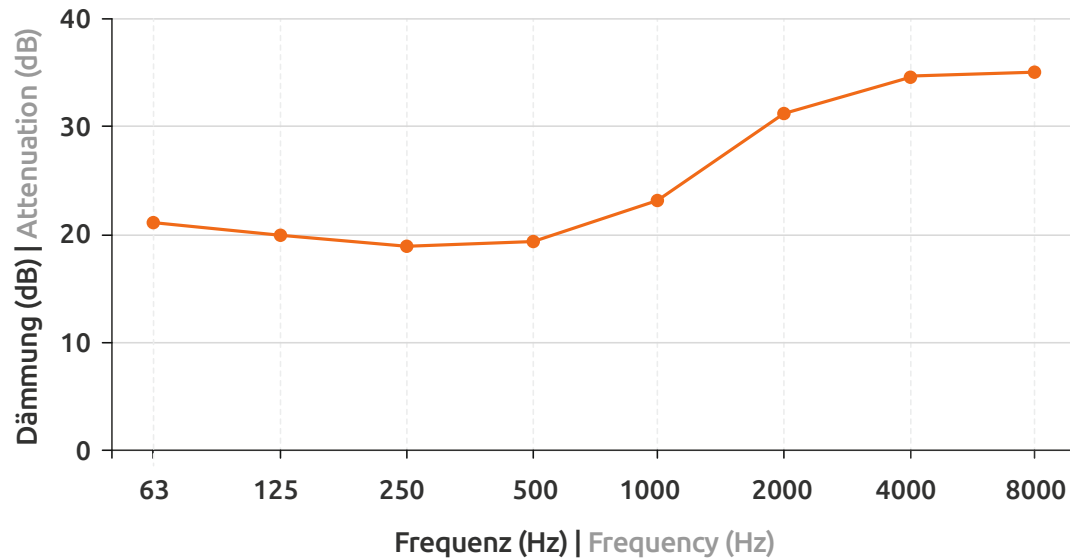

Technische Daten | Specifications

Frequenz Frequency (Hz)	Mittelwert* Average value* (dB)	Standardabweichung Standard deviation (dB)	Schutzwirkung** Protection** (dB)
63	21,0	8,0	13,3
125	20,0	5,7	14,3
250	19,0	5,7	13,3
500	19,8	5,4	14,4
1000	22,8	4,6	18,2
2000	31,0	4,3	26,7
4000	34,4	4,4	30,0
8000	34,9	5,6	29,3

* der Schalldämmung | of sound attenuation

** APV (angenommen) | APV (assumed)

*Weitere Angaben können beim Hersteller angefordert werden.
Further details can be requested from the manufacturer.*